


GE

Economy Compact Glasswasher – 365mm Rack W 440mm x D 515mm x H 780mm

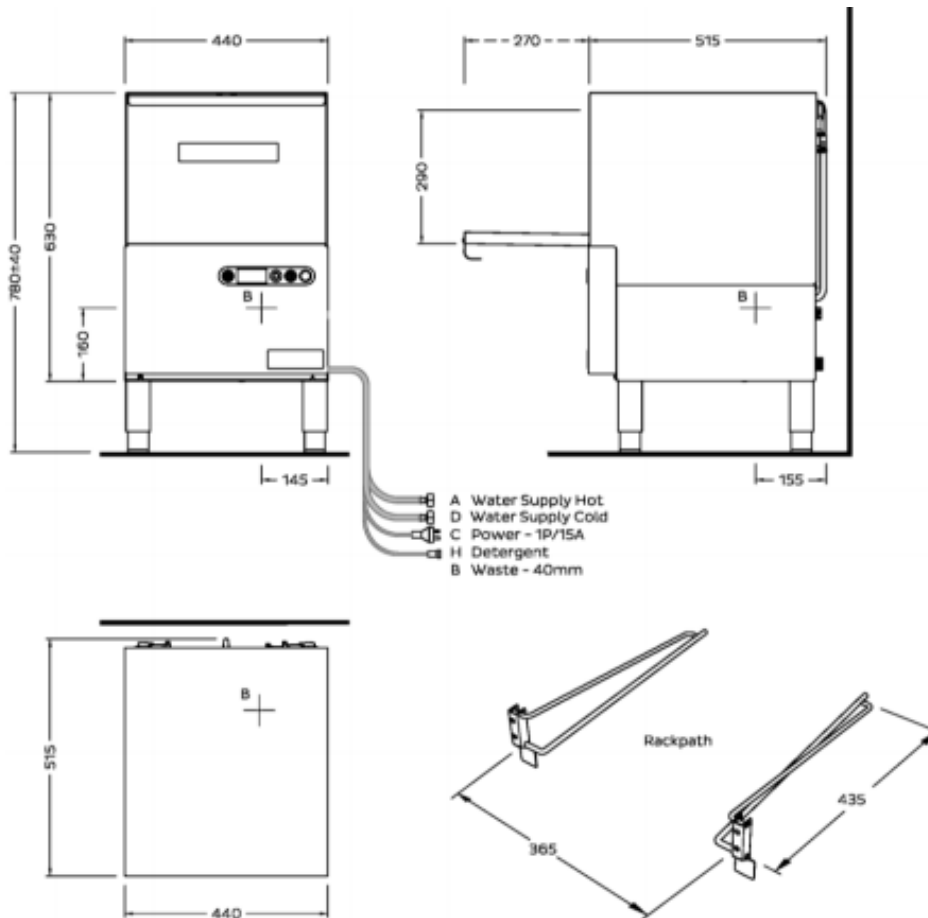

A Hot water	
Temperature	65°C
Connection	3/4" male; hose supplied
Pressure	200-350kPa
Flow	20 litres per min
Quality	Potable - refer table
Backflow Prevention	Atmospheric Vacuum Breaker
Consumption	4.5 litres per cycle*
D Cold water (optional cold rinse)	
Temperature	20°C
Connection	3/4" male; hose supplied
Pressure	200-350kPa
Flow	20 litres per min
Quality	Potable - refer table
Backflow Prevention	Atmospheric Vacuum Breaker
B Waste	
Connection	1.5" BSP
Line	2" BSP
C Electrical	
Single Phase	V Hz A/phase max kW 240 50 15 3

Dimensions		Machine	Packed
Width	440	480	
Depth	515	570	
Height	780	740	
Weight	26	39	
Cubicmetres		0.2	
Water Quality		Min	Max
pH		7	8
Hardness ppm		20	100
Cl ⁻			100
SO ₄			400
Fe			0.1
Mn			0.5
Cu			0.05
Cl ₂			0.1

Refer operator manual for installation instructions. Isolating switch must be within 1m of, and not directly behind the machine. Isolating water valve must be readily accessible.
*Consumption may vary with site conditions.