


GM

Professional Undercounter Glasswasher/Dishwasher – 450mm Rack
W 500mm x D 555mm x H 860mm

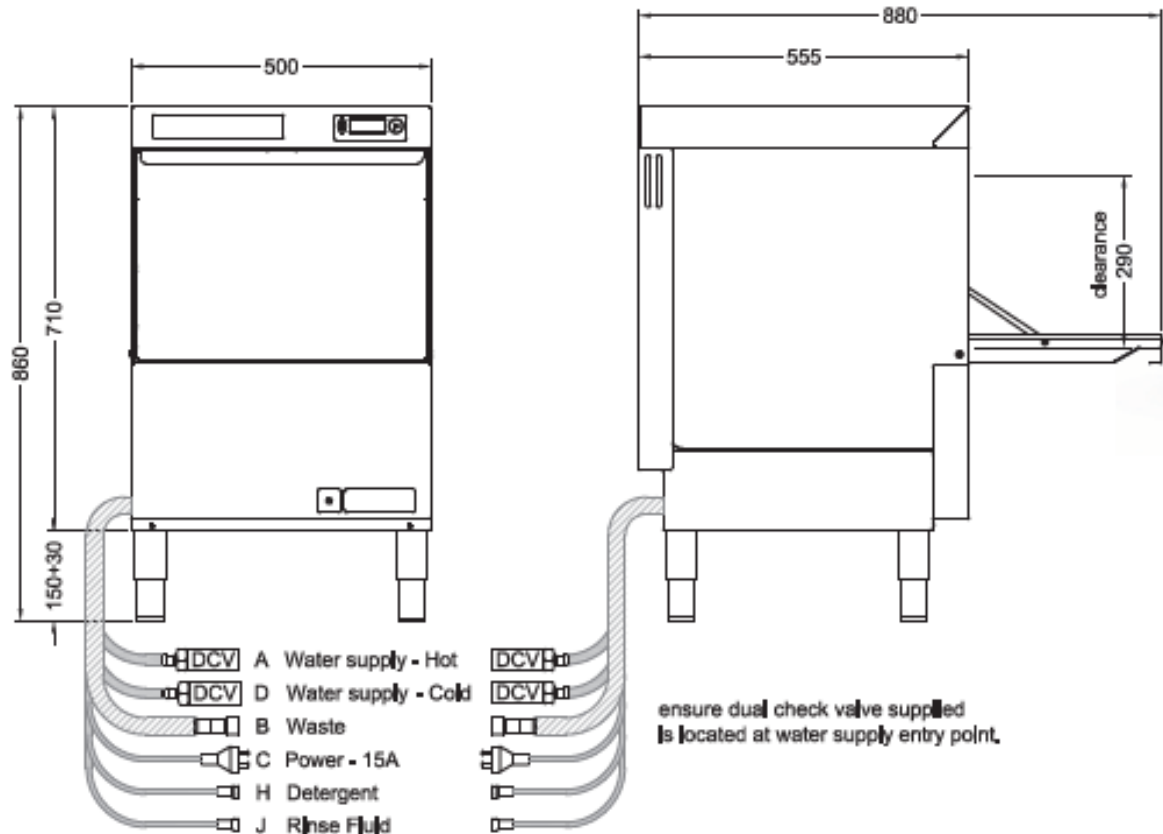

A Hot Water

Temperature	65°C
Connection	3/4" male hose supplied
Pressure	200-350kPa
Flow	20 litres per min
Quality	Potable & soft
Backflow Prevention	Dual Check Valve (DCV)
Consumption	2.2 litres per cycle

B Waste

Connection	Hose supplied for 38mm open standpipe 750 high or connection to sink trap
------------	---

C Electrical

Single phase	240V 50Hz 15A plugset supplied
--------------	--------------------------------

Maximum Power Consumption

Single phase	3.2kW
Heating	
Wash	2.5kW
Rinse	3.0kW

Dimensions

Width	500mm
Depth	555mm
Height	860mm
Weight	54kg

Packed Dimensions

Width	530mm
Depth	620mm
Height	830mm
Weight	68kg
Cubicmetres	0.27m ³

Water Quality Requirements

Hardness	ppm	pH
Min	20	7
Max	100	8

Ions	Cl ⁻	SO ₄	Fe	Mn	Cu	Cl ₂
Max mg/l	100	400	0.1	0.5	0.05	0.1

Refer operator manual for installation instructions

